

Radio
Receivers

Remotes

Gate
Controllers

Gate
Automation
Accessories

Gate
Motors

Access
Control



NEW!

GALACTIC

Save Time & Money

- programming remotes in the office
- self-activation by the user
- 65 000 installations with a unique code

**12
BUTTONS**



**MAGNETIC
WALL
HOLDER**

- modern design
- ergonomic housing
- low battery indication
- element of DTM868MHz system

MIX

GALACTIC

MIX is designed for remote control of building automation. Placed in a magnetic holder on the wall, turns into a 12-button wireless switch. Its design fits perfectly with the other accessories of electrical system of the building.



MIX
GALACTIC
remote

Parameters

number of buttons: 12
frequency: 868MHz
dimensions: 56x104x9mm
dimensions with handle: 80x104x18mm
battery: CR2430
maximum range: 250m
EIRP: to 10mW
variable rolling code: 104-bit IRS
number of combinations: 2,02824096E+31
housing: ABS
operating temperature (min./max.): -10°C / +55°C
weight: 36g
weight with holder: 54g
part of the system: DTM868MHz


Principle of operation

1




configuration and settings
in GSOFT programme,
programming the remote
with GALACTIC function
anywhere, eg. in the office

2



provide the remote to user

3

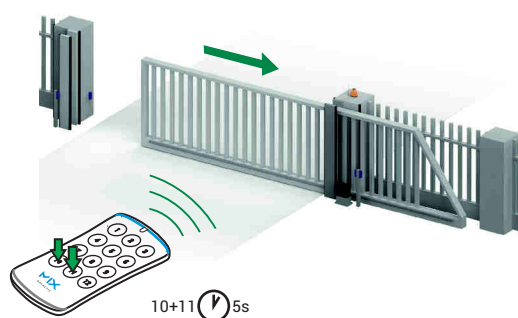

user in receiver radio range initiates adding
a transmitter to receiver by using remote buttons,
since that moment remote is active in the system

Radio
Receivers

Remotes

Gate
Controllers

Gate
Automation
Accessories

Gate
Motors

Access
Control



automation systems

DTM System, ul. Brzeska 7, 87-145 Bydgoszcz, POLAND, tel./fax +48 52 340 15 83, e-mail: dtm@dtm.pl
www.dtm.pl

