

Radio  
Receivers


Remotes

Gate  
Controllers

Gate  
Automation  
Accessories

Gate  
Motors

Access  
Control

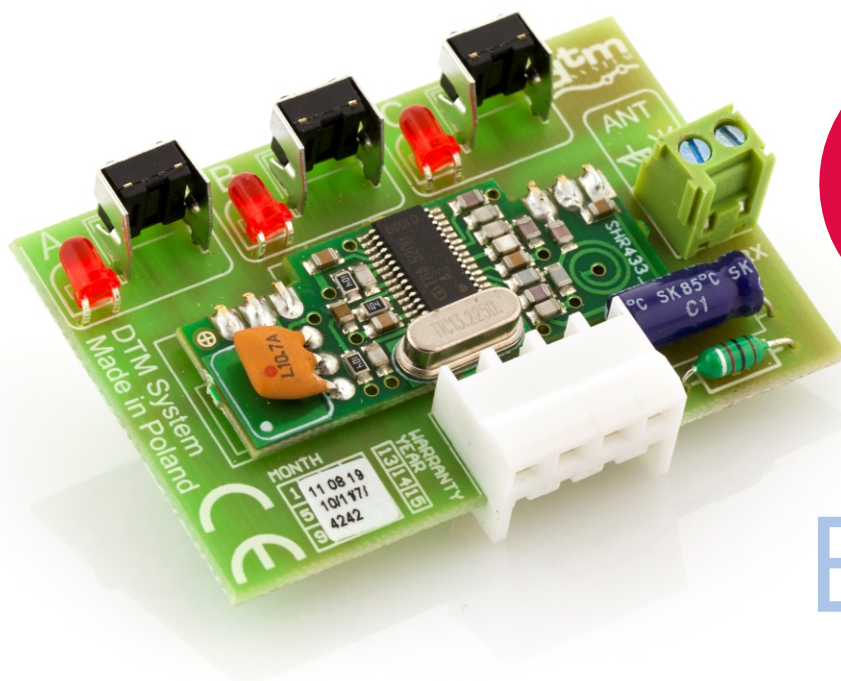

**FOR EASY  
GATE  
CONTROLLER**


EasyRX

available versions:



- easy installation
- simple programming
- superheterodyne radio receiver with quartz-stabilized reception frequency
- power from the control board through the connector
- compatible with DTM433MHz

EASYRX radio card is designed to implement the radio control on the motherboard of the EASY gate controllers.

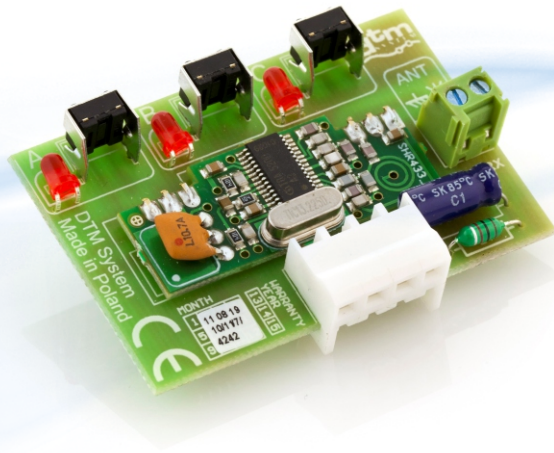

# EasyRX

radio card

## ➤ Basic parameters

- power supply: via gate controller
- max power consumption: 15mA
- memory: 35 remote controls with an individual number in memory. Remotes of DTM433MHz series, and in the MULTI version, in addition almost all remotes operating in the KeeLoq® system
- operating temperature (min./max): -20°C/+55°C
- card external dimensions: 55x40x13mm
- assembly: through mainboard connector
- weight: 10g

## ➤ Outputs

- relay output: digital output / 1

## ➤ Radio parameters

- radio module: integrated, superheterodyne, ensuring high reliability, repeatability and resistance to radio interference
- transmission protection: 64-bit KeeLoq®
- modulation / frequency: ASK / 433,92MHz
- impedance of antenna: 50Ω
- antenna: internal antenna, terminals for connecting an external antenna

## ➤ Functionality

- user interface: interface on three LEDs and three buttons
- remote configuration: the ability to assign any of the three receiver channels to any button
- deleting single remote: yes
- adding remote without access
  - to receiver buttons: yes, the presence of deleted remote necessary
- verifying the number of remotes in memory: yes, the function of easy adding the remote control

Radio  
Receivers

Remotes

Gate  
Controllers

Gate  
Automation  
Accessories

Gate  
Motors

Access  
Control



automation systems

DTM System, ul. Brzeska 7, 87-145 Bydgoszcz, POLAND, tel./fax +48 52 340 15 83, e-mail: dtm@dtm.pl  
www.dtm.pl

