

Radio
Receivers

Remotes

Gate
Controllers

Gate
Automation
Accessories

Gate
Motors


Access
Control



**CALL
AND OPEN
THE GATE**

**WORKS
IN 4G / LTE
NETWORK**

**CHECK
IF THE ALARM
IS ARMED**

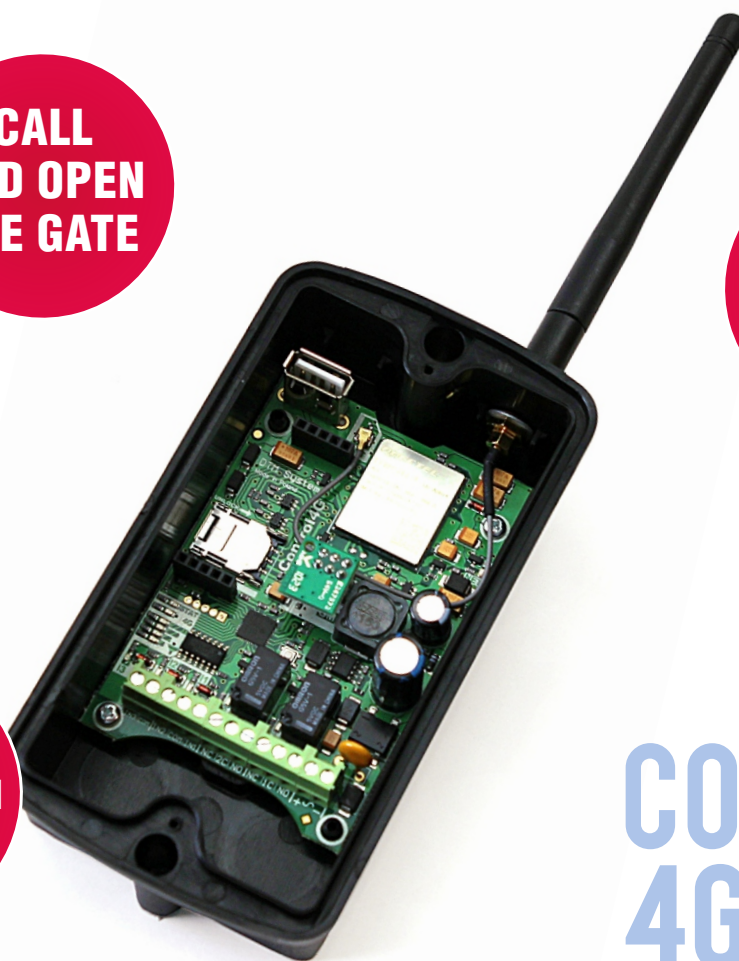

CONTROL 4G

- two NO / NC relay outputs
- 12 ... 24V AC / DC power supply
- memory of 4000 numbers
- two optional radio channels
- configuration and adding subscribers via MEMO service programmer
- dedicated control and configuration applications for Android mobile devices

CONTROL 4G is a 2/4-channel receiver, equipped with an LTE module working in 4G and 2G mobile networks, enabling easy and reliable remote control of automation using a telephone. The control is done by connecting the CLIP with the receiver number, sending an SMS control command or via the dedicated Control GSM Widget application. The receiver is equipped with 3 information inputs for connecting sensors, so you can get information about the status of the gate or alarm. Connecting an additional radio transmitting module allows you to control the DTM433MHz or DTM868MHz series receivers from your phone.

CONTROL 4G

2/4-channel GSM receiver

Parameters

power supply: 12...24VAC/DC±10%
power consumption: 500mA
operating temperature: -20°C to +55°C
memory capacity: 4000 subscribers (including 5 administrators)
relay outputs on the receiver's base board
(type / quantity / maximum load): NO or NC / 2 / 1A 24VAC or DC
information inputs: 3, programmable type NO / NC
output mode: bistable, monostable
back-up time adjustment
in monostable mode: 1s to 65535s, with a resolution of 1s
mobile network frequency: 4G / 2G
supported technology: 700 / 800 / 900 / 1800 / 2100 / 2600 MHz
external dimensions of the housing
/ receiver plates (width x length x height): 72x132x41mm / 58x88x27mm

Accessories

2CS 868
radio module
DTM868MHz

OPTIONAL RADIO MODULE

frequency: 433MHz lub 868MHz
number of channels: 2
power supply: from the receiver connector
dimensions: 22x43x15mm

2CS
radio module
DTM433MHz

MEMO
SERVICE PROGRAMMER
power supply: from a USB port or receiver
storage capacity: 2 MB
external dimensions of the housing: 75x45x15mm
method of communication
with the computer and receiver: via microUSB connector, cable included
User Interface: three buttons and three LEDs
software: dedicated MEMO MANAGER software (MS Windows®)



MEMO
service
programmer

Applications



- application for mobile devices with the Android® system
- receiver configuration and control
- giving user-friendly names of receiver's inputs and outputs
- automatically adding subscribers
- setting control access passwords



- application for mobile devices with the Android® system
- remote control on your phone
- convenient and intuitive control of automation devices
- checking the status of inputs and outputs
- button to control on the phone screen



- computer program for PC with MS Windows® system
- support for files from the MEMO service programmer
- clear program interface
- easy receiver configuration
- quick add subscribers
- import of subscribers from a CSV file