

Radio
Receivers

Remotes

Gate
Controllers

Gate
Automation
Accessories

Gate
Motors

Access
Control



**BLINK OF
LIGHTS
WILL OPEN
THE GATE**

**IMPOSSIBLE
TO LOSE**



BLINK

available versions:



- easy installation in the car
- four channels
- waterproof housing
- it does not require battery power
- compatible with DTM433MHz devices

The device is designed for installation in all kind of vehicles, using the existing electrical circuits (eg traffic lights), to control devices in an easy way. BLINK transmitter can be coupled with alarm installations, gate automation, as well as smart home installations equipped with DTM433MHz receiver.



BLINK


four-channel built-in radio transmitter

➤ Basic parameters

input: 6...30VDC
number of channels: 4
frequency: 433,92MHz
maximum range: to 150m
effective radiation power: to 10mW
variable coding system: 64-bit KeeLoq®
number of combinations: 4 294 967 296
operating temperature (min./max): -20°C / +55°C
IP: IP-66
assembly: metal handle with a 6,5mm hole
dimensions: 31x31x42mm, with handle 31x31x62mm
weight: 40g
series: DTM433MHz

➤ Example of use

1




* high beam bulb, horn, factory button in the car's cockpit or other devices whose momentary (several times) switching on will cause the relevant BLINK transmitter channel to work

2



BLINK transmitter in the car

3

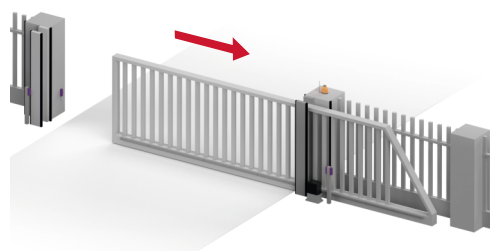

Radio
Receivers

Remotes

Gate
Controllers

Gate
Automation
Accessories

Gate
Motors

Access
Control



automation systems

DTM System, ul. Brzeska 7, 87-145 Bydgoszcz, POLAND, tel./fax +48 52 340 15 83, e-mail: dtm@dtm.pl
www.dtm.pl

