

automation systems

UVR-2 2-channel radio receiver



www.dtm.pl

Radio
Receivers

Remotes

Gate
Controllers

Gate
Automation
Accessories

Gate
Motors

Access
Control



**POWER
SUPPLY
230V**

UVR2

available versions:

dtm
433 MHz




dtm
433 MHz
MULTI



- remote and manual control
- advanced and simple programming
- maximum output load 16A/230VAC
- compatible with DTM433MHz series remotes

UVR-2 is a compact, two-channel radio receiver designed to work with 230VAC supplied devices. It provides a simple and inexpensive way to expand the functionality of the home and gate automation with remote control. Small housing allows to mount receiver in plastic box.

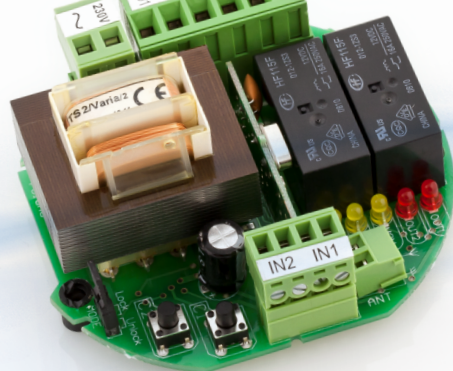

UVR2

2-channel radio receiver

➤ Basic parameters

power supply: 230VAC ±10%
 power consumption: 5VA
 memory: 35 remotes
 operating temperature (min./max.): -20°C/+55°C
 external dimensions (width x depth x height): 89x89x52mm
 mounting: installation box, IP54
 weight: 170g

➤ Executive elements

relay output
 (type / maximum load): NO or NC / 2/16A (230VAC)
 output mode: monostable, bistable or momentary
 monostable mode
 hold time: 0,5s; from 1s to 127s every 1s, and from 1min to 127min every 1min
 manual control input: 2NO type

➤ Radio parameters

radio module: integrated, superheterodyne
 transmission safety: 64-bit Keeloq®
 modulation / frequency: OOK/433,92MHz
 antenna impedance: 50Ω
 antenna: wire

➤ Functionality

user interface: based on two buttons and six LEDs
 remote configuration: ability to assign any button to receiver
 ability to register remotes
 without access to receiver button: easy remote registering function
 ability to delete single remote: yes, remote presence required
 verifying number of registered remotes: yes

Radio
Receivers

Remotes

Gate
Controllers

Gate
Automation
Accessories

Gate
Motors

Access
Control



automation systems

DTM System, ul. Brzeska 7, 87-145 Bydgoszcz, POLAND, tel./fax +48 52 340 15 83, e-mail: dtm@dtm.pl
www.dtm.pl

