
automation

systems

NEO remotes

CE



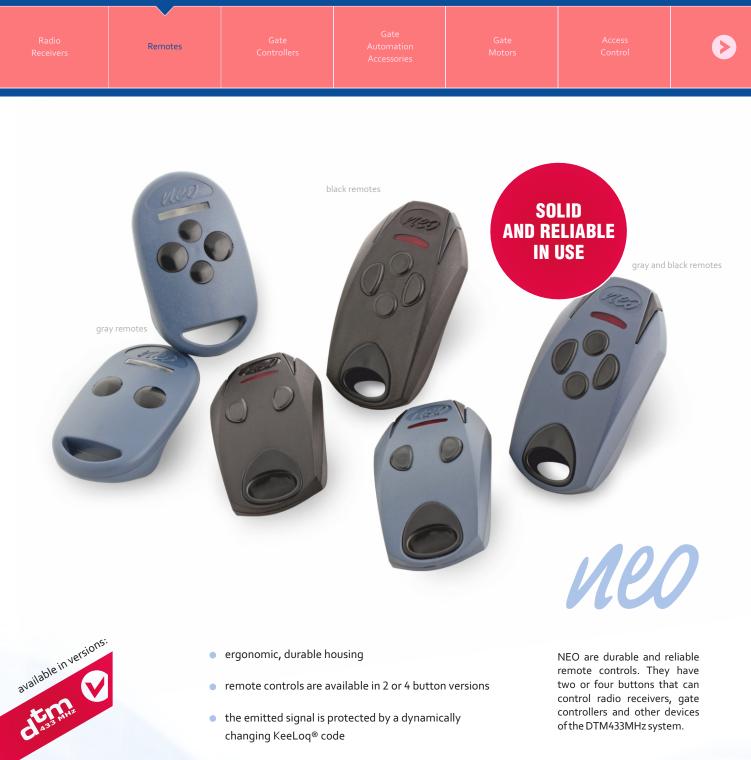

- the emitted signal is protected by a dynamically changing KeeLoq® code
- compatible with DTM433MHz series devices

control radio receivers, gate controllers and other devices of the DTM433MHz system.



Parameters Ø

number of buttons:	2 or 4		
frequency:	433,92MHz CR2032		
battery:			
max range:	150m		
max effective radiated power:			
variable rolling code:	64-bit KeeLoq®		
housing:			
operating temperature (min/max):	-10°C/+55°C		
3	30g (25g NEO gray)		
element of the system:	DTM433MHz		

NEO black & gray and black - dimensions



	Remotes					⊳
--	---------	--	--	--	--	---

automation systems

DTM System, ul. Brzeska 7, 87-145 Bydgoszcz, POLAND, tel./fax +48 52 340 15 83, e-mail: dtm@dtm.pl www.dtm.pl

